

SMART EMBEDDED DISPLAY - 5.0-INCH IPS TFT LCD 800*480 WITH CAPACITIVE TOUCH - ETEMB050027XDRA

Features:

- 15:9 5-inch 800*480 resolution IPS TFT display module
- 16.7M colors
- Brightness: 850 nits with capacitive touch screen
- Industrial Interface: FD CAN , RS485, USB(TYPE C)
- 7-36VDC Power supply range.
- Super Wide View: 80/80/80/80(L/R/U/D)
- The capacitive touch panel can be flexibly customized with features such as water rejection, glove support, etc.
- Arm M33 based MCU, and flash (up to 128 MB)

[Print](#)

Software

RTOS, GUI Development Software, and Initialization tool

FreeRTOS, TouchGFX, and CubeMX

Board Support Package

TouchGFX's tpa file support
Bootloader and flash-loader files

IDE

GCC, CubeIDE, IAR, and MDK-ARM

Overall

Size

5.0 inch

Outline Dimensions

137.24(W) x 94.04(H) x 16.6(D)(max) mm

Bonding Technology	Air Bonding
Display	
Color	16.7M
Panel Type	IPS-TFT LCD, Transmissive, Normally Black
Viewing Angle	Super Wide View, 80/80/80/80 (L/R/U/D)
Active Area (A.A.)	108(W) x 64.8(H) mm
Resolution	800RGB x 480
Brightness	850 nits
Viewing Area	108.8(W) x 65.6(H) mm
Active Area	108(W) x 64.8(H) mm
Dot Size	0.045(W) x 0.135(H) mm
Pixel Size	0.135(W) x 0.135(H) mm
Touch	
Type	Capacitive Touch Panel (CTP)
IC:	MICROCHIP mXT336UD
Structure	2 mm chemically strengthened cover glass
Power Consumption	
Voltage	7~36 V
	7 V: 440 mA
Current	12 V: 260 mA
	36 V: 92 mA
PoE Voltage	N/A
PoE Current	N/A
Embedded	
MCU	STM32U599
Internal SRAM	2.5MB
External SDRAM	N/A
Internal Flash	2MB
External Flash	32MB
Interface	
Power over Ethernet	N/A
USB	TYPE C
CAN	CAN 2.0 and FD CAN
UART	RS485
SPI	N/A
I2C	N/A
GPIO	N/A
Programming	SWD interface (ST-link)

Environment

Operating Temperature

-20~70 °C

Storage Temperature

-30~80 °C

Vibration

Operating: N/A

Storage: 11.76 m/s² (1.2g)

Shock

Operating: N/A

Storage: 490 m/s² (50g)


Certification

CE Certification

YES

ETEMB050027XDRAL | 800(RGB) x 480

DIMENSIONS

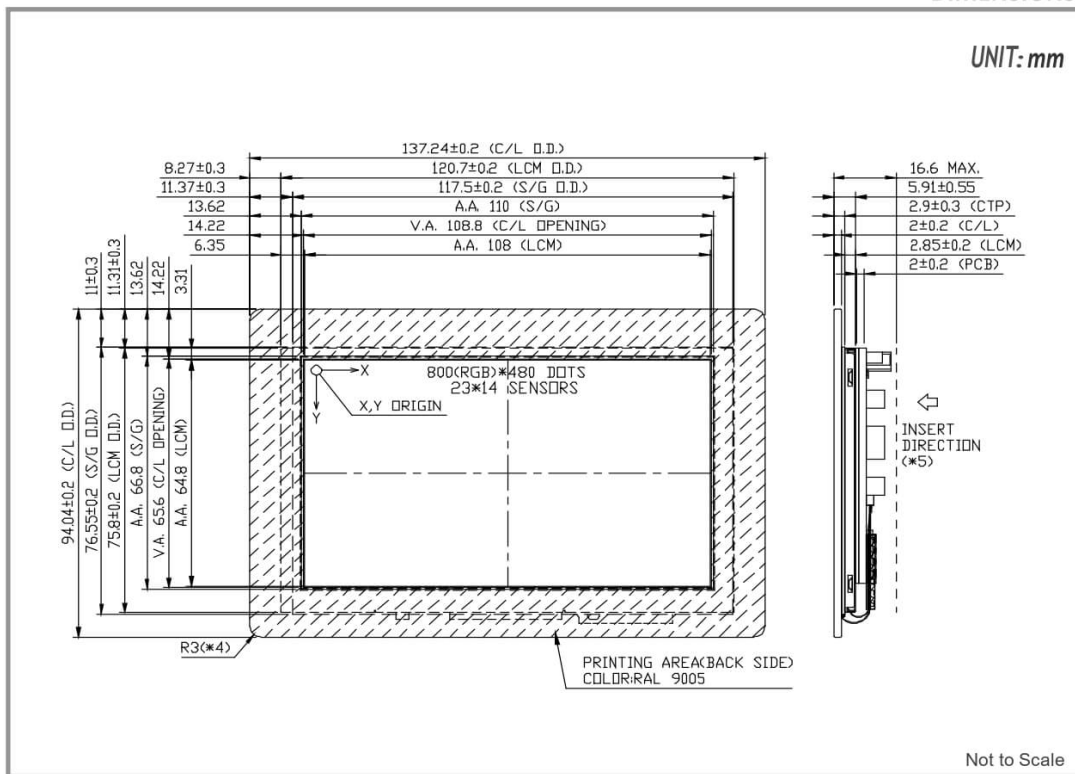

www.edtc.com

Emerging Display Technologies Corp.

Copyright 2007

Browser not compatible.